


## Series 3G... & 3F... Rotary Control Valves

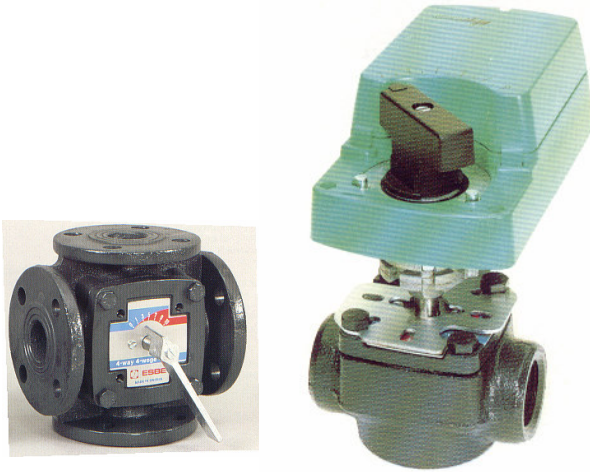

A Range of Screwed & Flanged Valves 15 to 150 mm for Mixing & Diverting applications

### Specifications & Applications

Series	Body	Stem	Max. Static Pressure
3G...Screwed	C.I.	S/S	6 Bar
3F... Flanged	C.I.	S/S	6 Bar



Media Temps: 2...110 °C

Linkages:

1-ESB - 4 Nm. Motors


2-ESB - \* & 16 Nm..Motors

### Applications

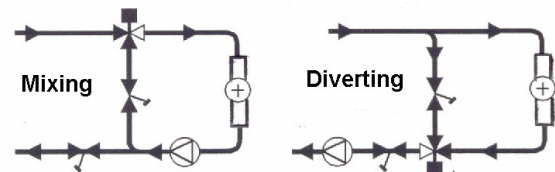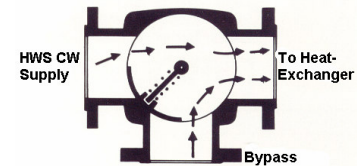

### Models

Model	Conns.	Max. Diff	Kvs	A	B	C	D	E	mm
3G20	20mm	1 Bar	8	52.5	105	--	185	183	
3G25	25mm	1 Bar	12	54	108	--	185	54	
3G32	32mm	1 Bar	18	57	115	--	185	190	
3G40	40mm	1 Bar	28	60	120	--	185	192	
3G50	50mm	1 Bar	44	78	156	--	190	204	
3F50	50mm	0.5 Bar	60	97.5	195	140	215	236	
3F65	65mm	0.5 Bar	90	100	200	160	225	246	
3F80	80mm	0.5 Bar	150	120	240	190	235	273	
3F100	100omm	0.5 Bar	225	132	265	210	245	295	
3F125	125mm	0.5 Bar	280	150	300	240	275	316	

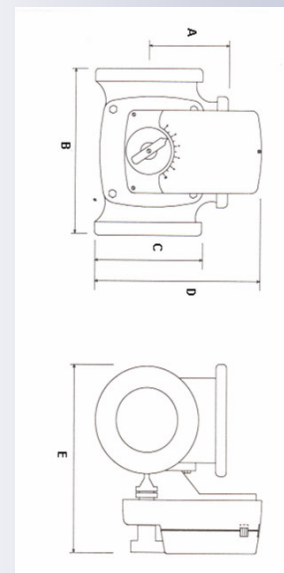

The manufacturer reserves the right to make changes without prior notice